

Produktionsskrivare med scanner


MX-M1056




MX-M1056, ett kraftfullt svartvitt produktionssystem som från början till slut ger maximal produktivitet till en lägre driftskostnad.

- Högvolymsskrivare för produktion med hastigheter på upp till 105 sidor/min och en upplösning på 1 200 × 1 200 dpi.
- Kraftfull Fiery® Server (tillval) för hantering av komplexa utskrifter, vilket ger maximal produktivitet från början till slut med lägre driftskostnad.
- 300 arks DSPF scannar dokument med 240 ipm* (dubbelsidigt) och hanterar papper med en tjocklek på upp till 220 g/m²
- Förbättrad produktivitet med flera alternativ för pappersfack med stor kapacitet, inklusive SRA3-kompatibilitet, för längre oavbruten utskrift.
- Easy UI-läge på en 15,4-tums vinklingsbar LCD-pekskärm i färg ger smidig och intuitiv användning.
- Exceptionell användarvänlighet med dedikerade användarikon för enkel inloggning, kontrollpanel som kan lutas för enkel visning och statusindikatorlampa som meddelar dig när skrivaren är redo för anv
- Omfattande range av efterbehandlingsalternativ, inklusive GBC´s professionella hålslag och Plockmatic inline-efterbehandling, som erbjuder professionell intern tillverkning av häften.
- Avancerat system-/dataskydd och åtkomstkontroll, inklusive självåterställning av skrivarens programvara och whitelist för externa kopplingar.

Konfigurationen

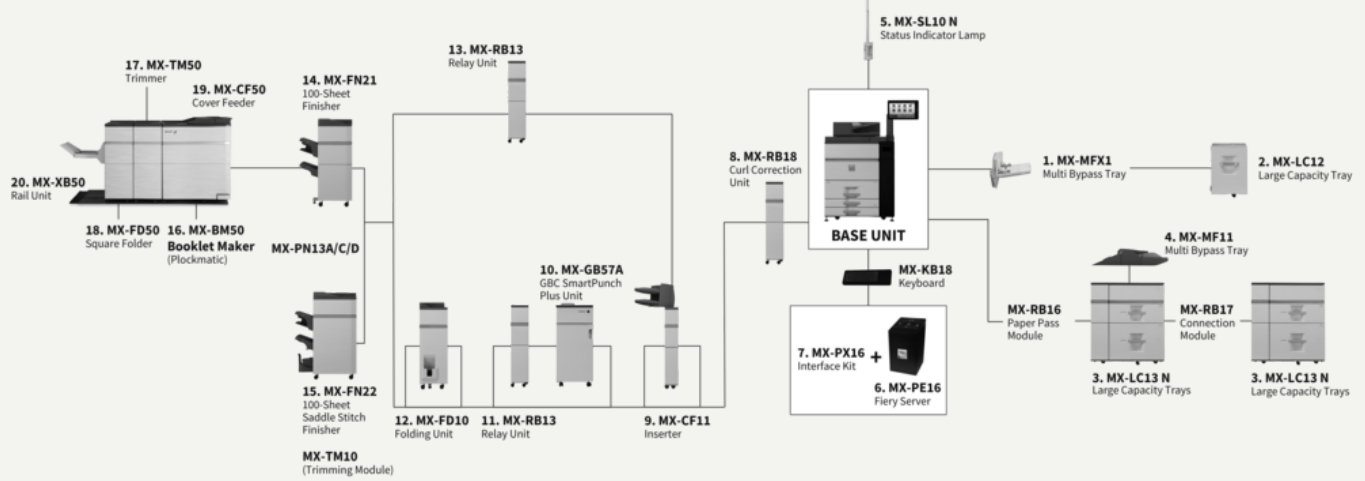

Mått

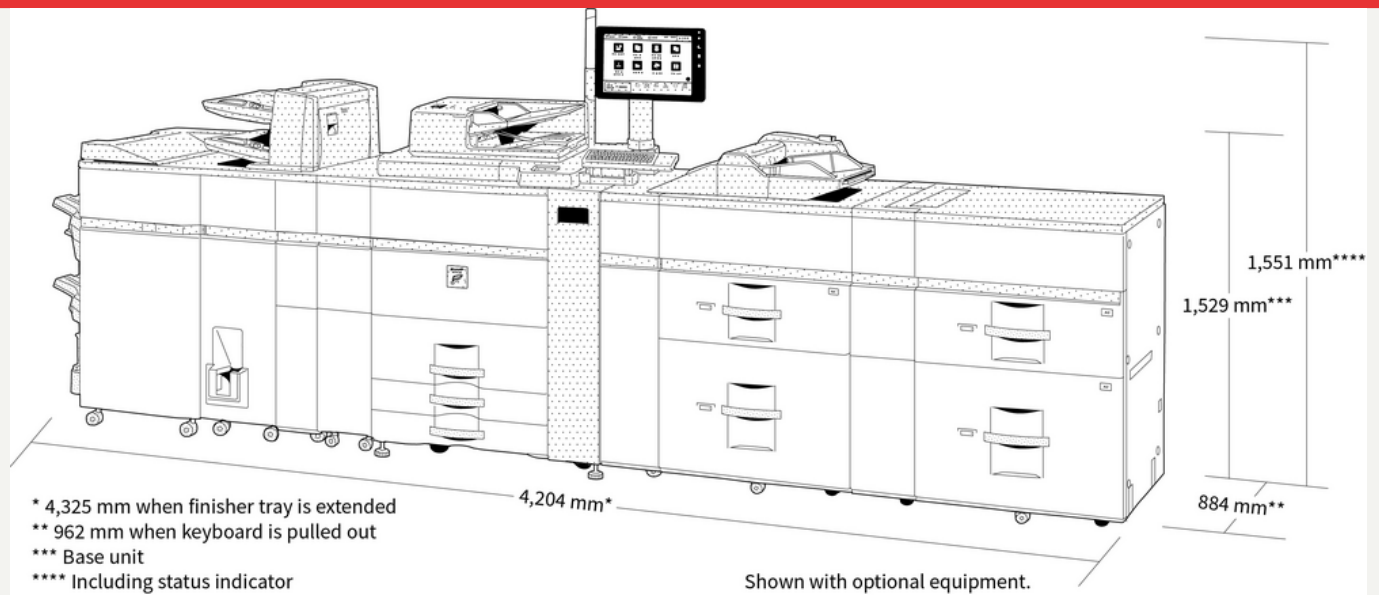

Basenhët

MX-MF11 Multi Bypass Tray (for MX-LC13N)

SRA3 - A5R (also supports 13" x 19.2"), 500 sheets (80gsm)

MX-LC12 Large Capacity Tray (A4)

A4 - B5, 3,500 sheets (80gsm); Requires MX-MFX1. Cannot be installed with MX-LCX3 N or MX-LC13 N.

MX-SL10N Status Indicator

MX-KB18

MX-PX16

MX-MFX1 Multi Bypass Tray (for main machine)

MX-PE16 Fiery® Print Server Fiery Server

High performance, production class workflow solution for high volume CRDs With the MX-PE16 Fiery® Print Server, Light Production Printing Systems become powerful integrated solutions for managing office workgroups and production environments. • Deliver fast processing speed • Achieve unparalleled image quality • Offer powerful features that produce complex finished documents

Sharp MX-LC13N Large Capacity Tray (A3)

SRA3-A4R (also supports 13" x 19.2"), 2,500 sheets each (80gsm); Requires MX-RB16. Cannot be installed with MX-LC12 or MX-LCX3 N.

Utskrift

MX-PF10 Barcode Font Kit

Enables barcode printing

Sharp OSA

MX-AMX1 Application Integration Module

Säkerhet

MX-FR66U Data Security Kit

Efterbehandling

MX-FD10 Folding Unit

Folding options include Z, C, accordion, double and half folds.; Can only be installed with MX-FN21 or MX-FN22.

MX-CF11 Inserter (200-sheet x 2 bin)

SRA3 - A5R, 200 sheets each (80g/m2).; Requires MX-RB26 and either MX-RB13 or MX-FD10 if connecting to MX-FN21 or MX-FN22.

MX-RB13 Relay Unit (between 100-sheet Finisher and inserter)

Required between 100 sheet staple finisher (MX-FN21 or MX-FN22) and MX-CF11.

MX-RB17 Connection Module

Required if 2 x MX-LC13 N are installed.

MX-XB50 Rail Unit (Plockmatic)

MX-TM10 Trimming Module

Requires MX-FN22

MX-RB18 Curl Correction Unit

MX-PN13A Punch Module - 2 Hole

Punch module for MX-FN21/MX-FN22

MX-GB57A GBC Smart Punch Unit

Available die sets: 21 holes, Plastic Comb; 20 holes, Plastic Comb; 47 holes, Color Coil; 23 holes, Wire 2:1/Square; 23 holes, Wire 2:1/Round; 34 holes, Wire 3:1/Square; 34 holes, Wire 3:1/Round; 12 holes, VeloBind; 34 holes, PloClick; 2 holes/Round (8mm pin); 4 holes/Round (8mm pin); 2 holes/Round (6.5mm pin); 4 holes/Round (6.5mm pin); 4 holes Scandinavian; Custom die sets also available on request; Requires MX-RB13 and either MX-FN21 or MX-FN22.

MX-PN13C Punch Module - 4 Hole

Punch module for MX-FN21/MX-FN22

MX-RB16 Paper Pass Module

MX-PN13D Punch Module - 4 Hole Wide

Punch module for MX-FN21/MX-FN22

MX-FN22 Saddle Stitch Finisher

(4k - 100-sheet staple) A4, A3, SRA3; Paper size: 206 x 275 mm (Min) to 320 x 457.2 mm (Max); Paper Weight: 60 -300 g/m2 Capacity: 1-20 sheets (stapled and folded); Requires MX-RB27.

MX-FN21 Finisher

(4k - 100-sheet staple); A3 - B5 (offset/staple), SRA3 - A5R (non offset).; Requires MX-RB27. Cannot be installed with MX-FN22.

Sharp MX-TM50 Trimmer (for Plockmatic)

Sharp MX-FD50 Square Folder (for Plockmatic)

Sharp MX-CF50 Cover Feeder

Sharp MX-BM50 Booklet Maker (Plockmatic)

Specifikationer

Allmänt

Hastighet svartvitt kopior/utskrifter per minut (A4)	105
Teknologi	52
Pappersvikt min (g/m ²)	52
Pappersvikt max (g/m ²)	300
Papperskapacitet: Standard (ark)	3100
Papperskapacitet: Max (ark)	13500
Uppvärmningstid (sek)	200
Minne max (GB)	6
Lagring: Std.	HDD
HDD-kapacitet: Std. (GB)	1000
Duplex	Std.
Elanslutning: frekvens min. (Hz)	50
Elanslutning: frekvens max. (Hz)	60
Energiförbrukning (kW)	299
Vikt (kg)	276
Elanslutning: min. (V)	200
Elanslutning: max. (V)	240

Kopiator

Pappersstorlek max	A3
Tid för förstakopia svartvitt (sek)	3,2
Elektronisk sortering	Opt.
Kontinuerlig kopiering (max kopior)	9999
Upplösning scanning svartvitt (dpi)	600 x 600
Upplösning scanning färg (dpi)	600 x 600
Upplösning skrivare (dpi)	1200 x 1200
Gradering (motsvarande nivåer) - svartvitt	256
Zoom min (%)	25
Zoom max (%)	400
Förinställda skalor	10
Nätverksscanner	Push scan, Pull scan

Efterbehandlare

Kapacitet max (ark)	4250
Häftning max (ark)	100
Sadelhäftning	Opt.
Off-set förskjutning	Std.
Hålslag	Opt.
GBC håslagsenhet	Opt.
Infogare	Opt.
Vikning	Opt.

Tonerkapacitet

Svart (sidor med 6 % täckningsgrad)	120000
-------------------------------------	--------

Skrivare

Nätverksskrivare	Std.
Upplösning (dpi)	1200 x 1200
Förstärkt upplösning (dpi)	1200 x 1200
Gränssnitt std	USB 2.0, 10Base-T, 100Base-TX, 1000Base-T
Stöder operativsystem standard	Windows 8.1, Windows 10, Windows Server 2012, Windows Server 2012R2, Windows Server 2016, Windows Server 2019, Mac OS X 10.8, Mac OS X 10.9, Mac OS X 10.10, Mac OS X 10.11, Mac OS X 10.12, Mac OS X 10.13, Mac OS X 10.14, Mac OS X 10.15, Mac OS X 11
Nätverksprotokoll	TCP/IP
Utskriftsprotokoll	LPR, Raw TCP (port 9100), POP3 (e-mail printing), HTTP, Novell Printserver application with NDS and Bindery, FPT for downloading print files, EtherTalk printing, IPP
Typsnitt	80 PCL, 136 PostScript 3

Scanner

Scanningmetod	Std.
Upplösning push scan (dpi)	100, 150, 200, 300, 400, 600
Upplösning pull scan (dpi)	75, 100, 150, 200, 300, 400, 600
Filformat std	TIFF, PDF, PDF/A-1b, Encrypted PDF, Compact PDF, JPEG, XPS, Searchable PDF, Office Open XML (pptx, xlsx, docx), Text (TXT), Rich Text (RFT)
Scannerdestination	Desktop, FTP, E-post, Nätverksmapp, USB minne

Arkivering

Dokumentarkivering	Std.
Lagrade jobb	Kopiering, Utskrift, Scanning
Lagringsmapp	Snabb, Huvud, Anpassad (max. 1000)
Konfidentiell lagring	True



Design and specifications are subject to change without prior notice. All information was correct at time of print. Microsoft, Excel, PowerPoint, OneDrive, SharePoint, Active Directory, Windows Server, and Windows are either registered trademarks or trademarks of Microsoft Corporation in the US and/or other countries. Adobe and PostScript 3 are either registered trademarks or trademarks of Adobe Systems Incorporated in the US and/or other countries. Google Drive, Gmail, Android, and Google Cloud Print are trademarks of Google LLC. The Google Drive trademark is used with permission from Google LLC. Box is a trademark, service mark, or registered trademark of Box, Inc. QR Code is a registered trademark of DENSO WAVE INCORPORATED in Japan and other countries. AirPrint and Mac are trademarks of Apple Inc., registered in the US and other countries. PCL is a registered trademark of Hewlett_x0002_Packard Company. Qualcomm DirectOffice is a product of Qualcomm Technologies, Inc. and/or its subsidiaries. Qualcomm is a trademark of Qualcomm Incorporated, registered in the US and other countries. DirectOffice is a trademark of CSR Imaging US, LP, registered in the US and other countries. All other company names, product names and logos are trademarks or registered trademarks of their respective owners. ©Sharp Corporation All trademarks acknowledged. E&O. Ref: MX-M1056, 23/7/2026