

Laserskrivare med scanner - svartvita A3


BP-70M55



BP-70M55 är ett säkert A3 monosystem för digitala arbetsplatser. Med enkel anslutning, bra säkerhet och hållbarhet har den många användbara funktioner

- Multifunktionsskrivare för svartvitt, 55 sidor/min, med smidig integration och anslutningar till molnbaserade affärsprocessapplikationer
- En plattform för hårdvara och lösningar med många funktioner som stöder digitala arbetsplatser
- Inbyggd Microsoft Teams-koppling underlättar samarbete genom direkt och säker åtkomst för utskrift från eller scanning till dina Microsoft Teams-kanaler
- System och funktioner för dataskydd är branschledande, dessutom finns BIOS-baserad säkerhet, och som standard Trusted Platform Module, som säkerställer att konfidentiella data hålls säkra
- Skydda din data, din enhet och ditt nätverk med Bitdefenderprogramvara mot skadlig kod (tillval)
- Hantera skrivaren direkt från din mobila enhet via WiFi, AirPrint, Bluetooth, NFC och QR-kod
- Med en enda inloggning kan du skriva ut från eller skanna till publika molnlagringstjänster på ett säkert, snabbt och enkelt sätt
- Det är enkelt att ställa in och hantera MFP:n med 10,1-tums LCD-färgdisplay, som har liknande användargränssnitt som smartphone
- Scanna i hastigheter på upp till 280ipm med avkännare (tillval) för att undvika dubbelmatning och eliminera avbrott i produktionen
- Många alternativ för efterbehandling, inklusive Z-vikningsenhet, ger ännu mer flexibilitet
- Lägre energiförbrukning i standby-läge och lågt TEC-värde ger överlägsen miljöprestanda
- Via Sharp Application Portal får systemet fjärruppdateringar av mjukvara och applikationer

Konfigurationer

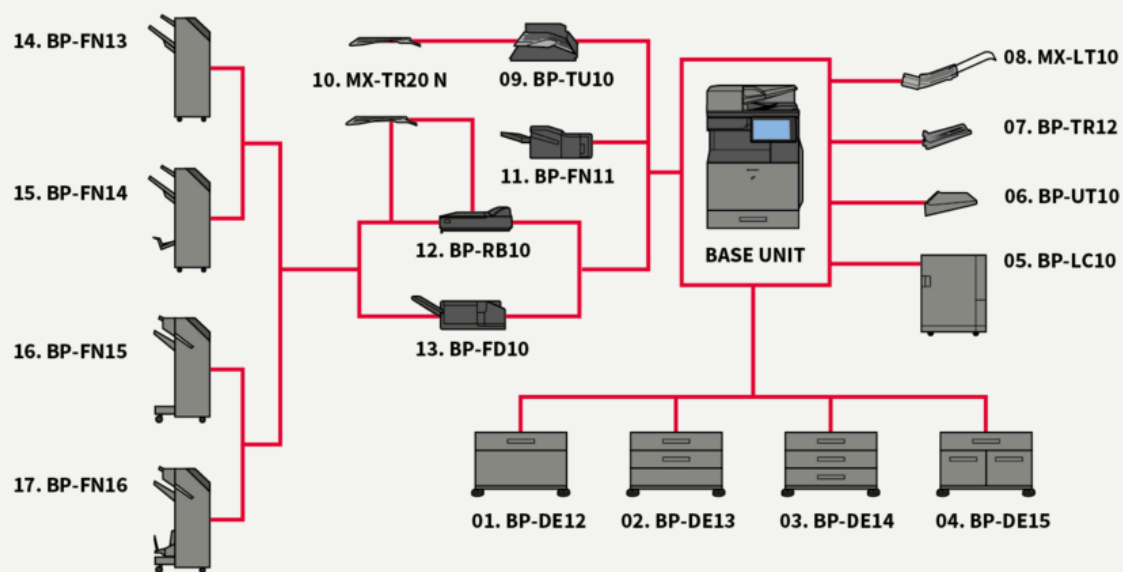

Mått



Basenhät

BP-LC10 Large Capacity Tray

3,000 sheets (based on 80 g/m²), A4-B5 (60-220 g/m²)

BP-DE14 Stand with 3 x 550-sheet Paper Drawers

550 sheets each for lower and upper trays (based on 80 g/m²), SRA3-A5R (60-300 g/m²)

BP-UT10 Utility Table

BP-DE13 Stand with 2 x 550-sheet Paper Drawers

550 sheets each for lower and upper trays (based on 80 g/m²), SRA3-A5R (60-300 g/m²)

BP-DD10 Double Feed Detection Unit

Eliminates double feeding of paper while scanning

BP-DE15 Stand with 550 + 2100-sheet Paper Drawers

Upper tray: SRA3-A5R, 550 sheets* (60-300 g/m²); Lower tray (Left): A4, 1,200 sheets* (60-105 g/m²); Lower tray (Right): A4 - B5, 900 sheets* (60-105 g/m²); * Number of sheets based on 80 g/m²

BP-DE12 Stand with 550-sheet Paper Drawer

550 sheets (based on 80 g/m²), SRA3-A5R (60-300 g/m²)

Säkerhet

BP-FR12U Data Security Kit

Commercial version

BP-VD10 Virus Detection Kit

Lagringsutrymme

BP-SD10 High Capacity SSD

512GB SSD

Utskrift

MX-PF10 Barcode Font Kit

Enables barcode printing

Sharp OSA

MX-AMX1 Application Integration Module

Fax

MX-FWX1

BP-FX11 Fax Expansion Kit

Efterbehandling

MX-LT10 Long Paper Feeding Tray

Recommended for banner printing

MX-PN15D Punch Module - 4 Hole Wide

Punch module for BP-FN13/BP-FN14/MX-FN28/MX-FN29

MX-PN14D Punch Module - 4 Hole Wide

Punch module for BP-FN11/BP-FN12

BP-FN14 1k Saddle Stitch Finisher

A3W-A5R (offset/staple), SRA3-A5R (non offset); Offset tray (upper): max. 1,000-sheet paper capacity (based on 80 g/m²); Stapling capacity: max. 50-sheet multi-position staple (based on 80 g/m²); Saddle stitch tray (lower): 7 sets (11-15 sheets), 10 sets (6-10 sheets), 20 sets (1-5 sheets). 15 sheets max per set; Requires BP-RB10 Paper Pass Unit

MX-PN16D Punch Module - 4 Hole Wide

Punch module for BP-FN15/BP-FN16/MX-FN30/MX-FN31/MX-FN34/MX-FN35

MX-PN15C Punch Module - 2/4 Hole

Punch module for BP-FN13/BP-FN14/MX-FN28/MX-FN29

MX-PN14C Punch Module - 2/4 Hole

Punch module for BP-FN11/BP-FN12

BP-FN13 1k Finisher

A3W-A5R (offset/staple), SRA3-A5R (non offset); Offset tray (upper): max. 1,000-sheet paper capacity (based on 80 g/m²); Stapling capacity: max. 50-sheet multi-position staple (based on 80 g/m²); Requires BP-RB10 Paper Pass Unit

BP-FD10 Folding Unit

200 sheets (based on 80 g/m²), A3, B4, A4R (Z-fold, half fold), A3, A4R (C-Fold, Accordion fold), 60-256 g/m²

MX-PN16C Punch Module - 2/4 Hole

Punch module for BP-FN15/BP-FN16/MX-FN30/MX-FN31/MX-FN34/MX-FN35

MX-PN15B Punch Module - 3 Hole

Punch module for BP-FN13/BP-FN14

MX-PN14B Punch Module - 3 Hole

Punch module for BP-FN11/BP-FN12

BP-TR12 Exit Tray Unit

BP-RB10 Paper Pass Unit

Required when using BP-FN13, BP-FN14, BP-FN15 or BP-FN16

BP-FN16 3k Saddle Stitch Finisher

A3-B5 (offset/staple), SRA3-A5R (non offset); Offset tray (upper): max. 3,000-sheet paper capacity (based on 80 g/m²); Stapling capacity: max. 65-sheet multi-position staple (based on 80 g/m²); Manual Stapling: 1-point at rear (Flat), 45 sheets (64 g/m²), 40 sheets (80 g/m²); Stapleless capacity: max. 10-sheet (64 g/m²), 8 sheet (65 - 81.4 g/m²), 6 sheet (81.5 - 105 g/m²); Saddle stitch tray (lower): 10 sets (11-20 sheets), 15 sets (6-10 sheets), 25 sets (1-5 sheets). 20 sheets max per set; Requires BP-RB10 Paper Pass Unit

BP-FN11 Inner Finisher

A3 - B5 (offset/staple), SRA3 - A5R (non offset); Offset tray (upper): max. 500-sheet paper capacity (based on 80 g/m²); Stapling capacity: max. 50-sheet multi-position staple (based on 80 g/m²); Manual Stapling: 1-point at rear (Flat), 45 sheets (64 g/m²), 40 sheets (80 g/m²); Stapleless capacity: max.10-sheet (64 g/m²), 8 sheet (65-81.4 g/m²), 6 sheet (81.5-105 g/m²); Requires BP-RB10 Paper Pass Unit

MX-PN16B Punch Module - 3 Hole

Punch module for BP-FN15/BP-FN16

BP-FN15 3k Finisher

A3-B5 (offset/staple), SRA3-A5R (non offset); Offset tray (upper): max. 3,000-sheet paper capacity (based on 80 g/m²); Stapling capacity: max. 65-sheet multi-position staple (based on 80 g/m²); Manual Stapling: 1-point at rear (Flat), 45 sheets (64 g/m²), 40 sheets (80 g/m²); Stapleless capacity: max. 10-sheet (64 g/m²), 8 sheet (65 - 81.4 g/m²), 6 sheet (81.5 - 105 g/m²); Requires BP-RB10 Paper Pass Unit

Specifikationer

Allmänt

Hastighet svartvitt kopior/utskrifter per minut (A4)	55
Teknologi	26
Pappersstorlek min	A6R
Pappersstorlek max	A3W
Pappersvikt min (g/m ²)	55
Pappersvikt max (g/m ²)	300
Papperskapacitet: Standard (ark)	650
Papperskapacitet: Max (ark)	6300
Uppvärmningstid (sek)	15
Minne max (GB)	5
Lagring: Std.	SSD
Lagring: Opt.	SSD
SSD-kapacitet: Std. (GB)	256
SSD-kapacitet: Opt. (GB)	512
Duplex	Std.
Elanslutning: frekvens min. (Hz)	50
Elanslutning: frekvens max. (Hz)	60
Energiförbrukning (kW)	1,84
Bredd basenhet (mm)	609
Djup basenhet (mm)	662
Höjd basenhet (mm)	860
Vikt (kg)	70
Elanslutning: min. (V)	220
Elanslutning: max. (V)	240

Fax

Fax	Opt.
Komprimeringsmetod	MH, MR, MMR, JBIG
Kommunikationsprotokoll	Super G3, G3
Överföringstid	2
Modemhastighet min (bps)	2400
Modemhastighet max (bps)	33600
Överföringsupplösning std (dpi)	203.2 x 97.8 dpi
Överföringsupplösning ultrafin (dpi)	406.4 x 391 dpi
Arbetsbredd (min)	A5
Arbetsbredd (max)	A3
Minne max (GB)	4
Gråskalenivåer	256
Registrering av inkommande/utgående fax	2000
Grupsändning	500

Trådlöst nätverk

Trådlöst nätverk	Std.
Kommunikationsstandard	IEEE802.11a/ac/b/g/n
Åtkomstnivå	Infrastructure mode, Software AP mode
Säkerhet	WEP, WPA/WPA2-mixed PSK, WPA/WPA2-mixed EAP, WPA2 PSK, WPA2 EAP, WPA2 EAP/WPA3-mixed, PSK/SAE, WPA3 SAE, WPA2/WPA3-mixed, WPA3 EAP

Arkivering

Dokumentarkivering	Std.
Lagrade jobb	Kopiering, Utskrift, Scanning, Fax
Lagringsskapp	Snabb, Huvud, Anpassad (max. 1000)

Tonerkapacitet

Svart (sidor med 6 % täckningsgrad)	40000
-------------------------------------	-------

Skrivare

Nätverksskrivare	Std.
Upplösning (dpi)	1200 x 1200, 600 x 600, 9600 x 600
Gränssnitt std	USB 2.0, USB 3.0, 10Base-T, 100Base-TX, 1000Base-T
Stöder operativsystem standard	Windows 8.1, Windows 10, Windows 11, Windows Server 2012, Windows Server 2012R2, Windows Server 2016, Windows Server 2019, Mac OS X 10.10, Mac OS X 10.11, Mac OS X 10.12, Mac OS X 10.13, Mac OS X 10.14, Mac OS X 10.15, Mac OS X 11, Mac OS X 12
Nätverksprotokoll	TCP/IP (IPv4, IPv6)
Utskriftsprotokoll	LPR, Raw TCP (port 9100), POP3 (e-mail printing), HTTP, FPT for downloading print files, IPP, SMB, WSD
Typsnitt	80 PCL, 139 PostScript 3

Kopiator

Pappersstorlek max	A3
Tid för förstakopia svartvitt (sek)	3,5
Elektronisk sortering	Opt.
Kontinuerlig kopiering (max kopior)	9999
Upplösning scanning svartvitt (dpi)	600 x 600, 600 x 400, 600 x 300
Upplösning scanning färg (dpi)	600 x 600
Upplösning skrivare (dpi)	1200 x 1200, 600 x 600, 9600 x 600
Gradering (motsvarande nivåer) - färg	256
Gradering (motsvarande nivåer) - svartvitt	2
Zoom min (%)	25
Zoom max (%)	400
Förinställda skalor	10
Nätverksscanner	Push scan, Pull scan

Scanner

Scanningmetod	Std.
Upplösning push scan (dpi)	100, 150, 200, 300, 400, 600
Upplösning pull scan (dpi)	75, 100, 150, 200, 300, 400, 600, 50-9600
Filformat std	TIFF, PDF, PDF/A-1a, PDF/A-1b, Encrypted PDF, Compact PDF, JPEG, XPS, Searchable PDF, Microsoft Office (pptx, xlsx, docx), Text (TXT), Rich Text (RFT)
Scannerdestination	Desktop, FTP, E-post, Nätverksmapp, USB minne

Efterbehandlare

Kapacitet min (ark)	500
Kapacitet max (ark)	3000
Häftning max (ark)	65
Sadelhäftning	Opt.
Off-set förskjutning	Std.
Hålslag	Opt.



Design and specifications are subject to change without prior notice. All information was correct at time of print. Microsoft, Excel, PowerPoint, OneDrive, SharePoint, Active Directory, Windows Server, and Windows are either registered trademarks or trademarks of Microsoft Corporation in the US and/or other countries. Adobe and PostScript 3 are either registered trademarks or trademarks of Adobe Systems Incorporated in the US and/or other countries. Google Drive, Gmail, Android, and Google Cloud Print are trademarks of Google LLC. The Google Drive trademark is used with permission from Google LLC. Box is a trademark, service mark, or registered trademark of Box, Inc. QR Code is a registered trademark of DENSO WAVE INCORPORATED in Japan and other countries. AirPrint and Mac are trademarks of Apple Inc., registered in the US and other countries. PCL is a registered trademark of Hewlett_x0002_Packard Company. Qualcomm DirectOffice is a product of Qualcomm Technologies, Inc. and/or its subsidiaries. Qualcomm is a trademark of Qualcomm Incorporated, registered in the US and other countries. DirectOffice is a trademark of CSR Imaging US, LP, registered in the US and other countries. All other company names, product names and logos are trademarks or registered trademarks of their respective owners. ©Sharp Corporation All trademarks acknowledged. E&O. Ref: BP-70M55, 27/7/2026