

Laserskrivare med scanner - svartvita A3


BP-50M36




BP-50M36 är ett säkert A3 monosystem för digitala arbetsplatser. Med enkel anslutning, bra säkerhet och hållbarhet har den många användbara funktioner

- Multifunktionsskrivare för svartvitt, 36 sidor/min, med smidig integration och anslutningar till molnbaserade affärsprocessapplikationer
- En plattform för hårdvara och lösningar med många funktioner som stöder digitala arbetsplatser
- Inbyggd Microsoft Teams-koppling (tillval) underlättar samarbete genom direkt och säker åtkomst för utskrift från eller scanning till dina Microsoft Teams-kanaler
- System och funktioner för dataskydd är branschledande, dessutom finns BIOS-baserad säkerhet, och som standard Trusted Platform Module, som säkerställer att konfidentiella data hålls säkra
- Skydda din data, din enhet och ditt nätverk med Bitdefenderprogramvara mot skadlig kod (tillval)
- Hantera skrivaren direkt från din mobila enhet via WiFi, AirPrint (tillval), Bluetooth, NFC och QR-kod
- Med en enda inloggning kan du skriva ut från eller skanna till publika molnlagringstjänster på ett säkert, snabbt och enkelt sätt
- Det är enkelt att ställa in och hantera MFP:n med 10,1-tums LCD-färgdisplay, som har liknande användargränssnitt som smartphone
- Omfattande efterbehandlingsalternativ, inklusive en vikningsenhet, ger ännu mer flexibilitet för din utskrift.
- Överlägsen miljöprestanda ger lägre energiförbrukning i standby-läge och lågt TEC-värde.
- Håll dig uppdaterad och kompatibel med fjärruppdateringar av firmware och applikationer via Sharp Application Portal.
- 100 ark dokumentmataren skannar ensidiga eller dubbelsidiga original i hastigheter på upp till 80ipm för att slutföra stora jobb med lätthet och effektivitet.

Konfigurationer

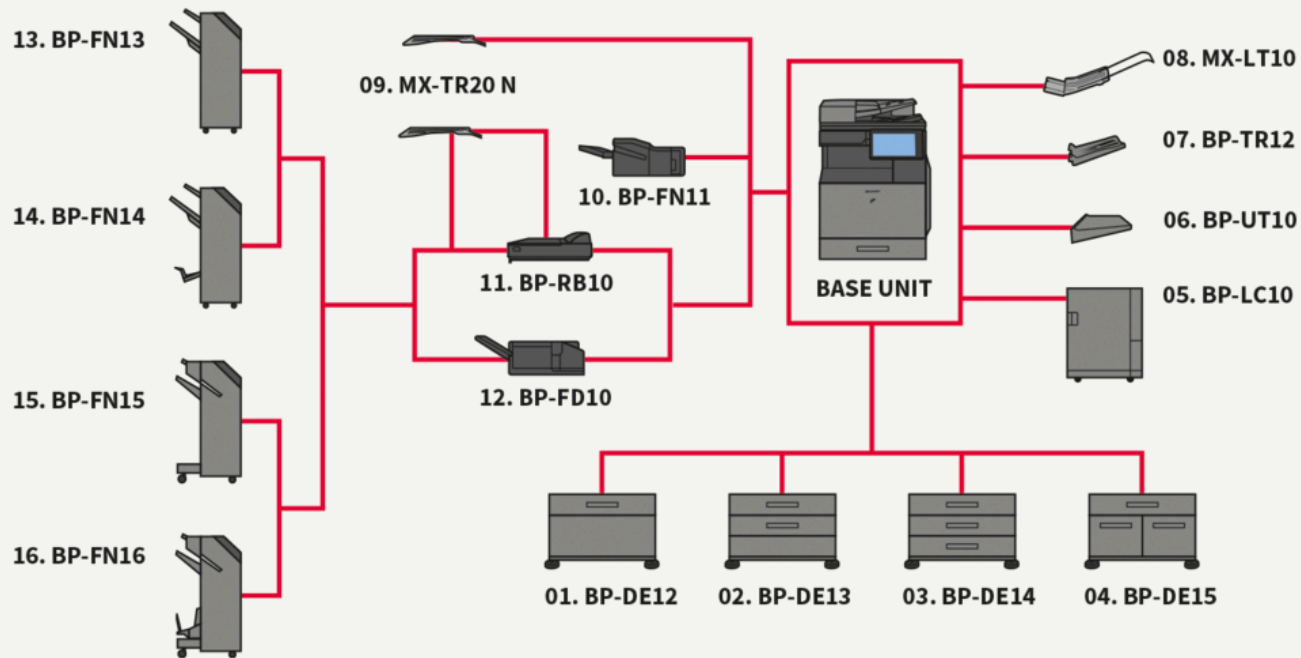

Mått

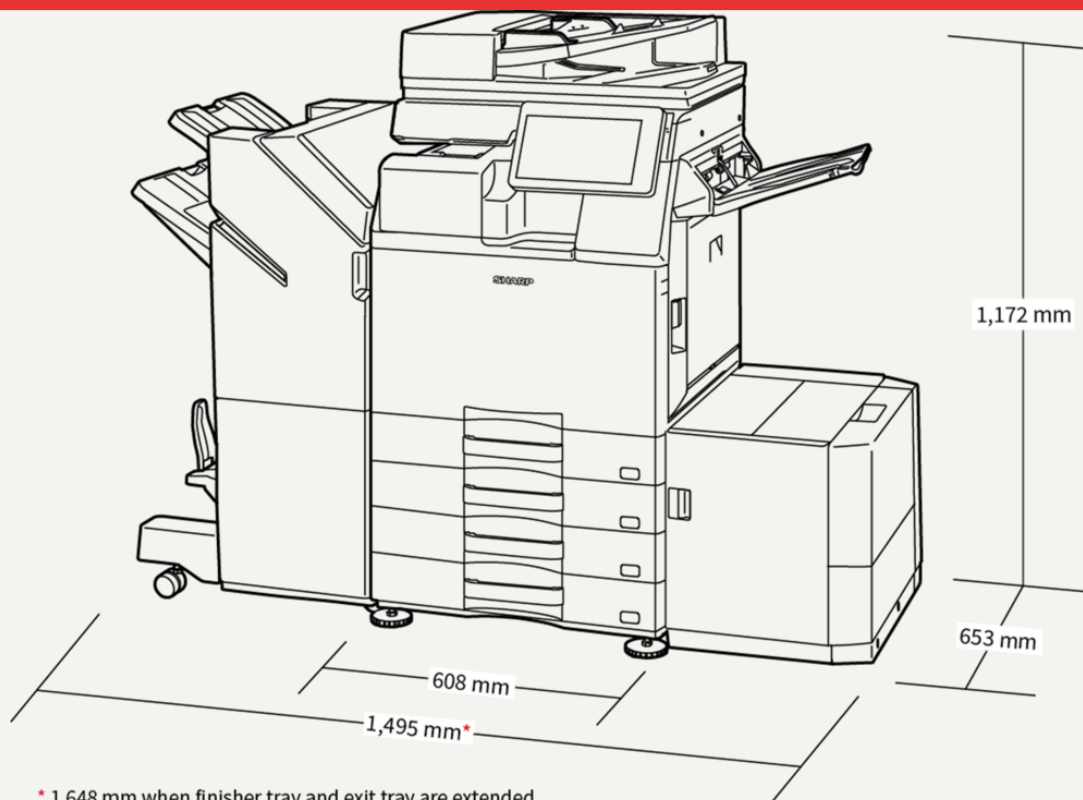

Basenhjet

BP-LC10 Large Capacity Tray

3,000 sheets (based on 80 g/m²), A4-B5 (60-220 g/m²)

BP-DE14 Stand with 3 x 550-sheet Paper Drawers

550 sheets each for lower and upper trays (based on 80 g/m²), SRA3-A5R (60-300 g/m²)

BP-UT10 Utility Table

BP-DE13 Stand with 2 x 550-sheet Paper Drawers

550 sheets each for lower and upper trays (based on 80 g/m²), SRA3-A5R (60-300 g/m²)

BP-DE15 Stand with 550 + 2100-sheet Paper Drawers

Upper tray: SRA3-A5R, 550 sheets* (60-300 g/m²); Lower tray (Left): A4, 1,200 sheets* (60-105 g/m²); Lower tray (Right): A4 - B5, 900 sheets* (60-105 g/m²); * Number of sheets based on 80 g/m²

BP-DE12 Stand with 550-sheet Paper Drawer

550 sheets (based on 80 g/m²), SRA3-A5R (60-300 g/m²)

Skanning

MX-EB20 OCR Expansion Kit

Convert scanned documents into editable Microsoft® Office files and searchable PDFs via Optical Character Recognition (OCR).

Essential MFPs only

MX-EB19 Enhanced Compression Kit

Enables creation of high compression PDFs.

Utskrift

MX-PF10 Barcode Font Kit

Enables barcode printing

MX-PK13 PS3 Expansion Kit

Adobe PostScript®3™ expansion kit. Essential MFPs only.

MX-PU10 Direct Print Expansion Kit

Direct print Microsoft® Office files from USB drives. Essential MFPs only.

Sharp OSA

MX-AMX1 Application Integration Module

BP-AM11 External Account Module

BP-AM10 Application Communication Module

Säkerhet

BP-FR12U Data Security Kit

Commercial version

BP-VD10 Virus Detection Kit

Anslutning

BP-EB10 Wireless Connection Adaptor

Enables connection to wireless networks

Lagringstrykke

BP-SD10 High Capacity SSD

512GB SSD

Fax

MX-FWX1

BP-FX11 Fax Expansion Kit

Efterbehandling

MX-LT10 Long Paper Feeding Tray

Recommended for banner printing

MX-PN15D Punch Module - 4 Hole Wide

Punch module for BP-FN13/BP-FN14/MX-FN28/MX-FN29

MX-PN14D Punch Module - 4 Hole Wide

Punch module for BP-FN11/BP-FN12

BP-TU10 Exit Tray Cabinet

BP-FN14 1k Saddle Stitch Finisher

A3W-A5R (offset/staple), SRA3-A5R (non offset); Offset tray (upper): max. 1,000-sheet paper capacity (based on 80 g/m²); Stapling capacity: max. 50-sheet multi-position staple (based on 80 g/m²); Saddle stitch tray (lower): 7 sets (11-15 sheets), 10 sets (6-10 sheets), 20 sets (1-5 sheets). 15 sheets max per set; Requires BP-RB10 Paper Pass Unit

MX-PN16D Punch Module - 4 Hole Wide

Punch module for BP-FN15/BP-FN16/MX-FN30/MX-FN31/MX-FN34/MX-FN35

MX-PN15C Punch Module - 2/4 Hole

Punch module for BP-FN13/BP-FN14/MX-FN28/MX-FN29

MX-PN14C Punch Module - 2/4 Hole

Punch module for BP-FN11/BP-FN12

BP-FN13 1k Finisher

A3W-A5R (offset/staple), SRA3-A5R (non offset); Offset tray (upper): max. 1,000-sheet paper capacity (based on 80 g/m²); Stapling capacity: max. 50-sheet multi-position staple (based on 80 g/m²); Requires BP-RB10 Paper Pass Unit

BP-FD10 Folding Unit

200 sheets (based on 80 g/m²), A3, B4, A4R (Z-fold, half fold), A3, A4R (C-Fold, Accordion fold), 60-256 g/m²

MX-PN16C Punch Module - 2/4 Hole

Punch module for BP-FN15/BP-FN16/MX-FN30/MX-FN31/MX-FN34/MX-FN35

MX-PN15B Punch Module - 3 Hole

Punch module for BP-FN13/BP-FN14

MX-PN14B Punch Module - 3 Hole

Punch module for BP-FN11/BP-FN12

BP-TR12 Exit Tray Unit

BP-RB10 Paper Pass Unit

Required when using BP-FN13, BP-FN14, BP-FN15 or BP-FN16

BP-FN16 3k Saddle Stitch Finisher

A3-B5 (offset/staple), SRA3-A5R (non offset); Offset tray (upper): max. 3,000-sheet paper capacity (based on 80 g/m²); Stapling capacity: max. 65-sheet multi-position staple (based on 80 g/m²); Manual Stapling: 1-point at rear (Flat), 45 sheets (64 g/m²), 40 sheets (80 g/m²); Stapleless capacity: max. 10-sheet (64 g/m²), 8 sheet (65 - 81.4 g/m²), 6 sheet (81.5 - 105 g/m²); Saddle stitch tray (lower): 10 sets (11-20 sheets), 15 sets (6-10 sheets), 25 sets (1-5 sheets). 20 sheets max per set; Requires BP-RB10 Paper Pass Unit

BP-FN11 Inner Finisher

A3 - B5 (offset/staple), SRA3 - A5R (non offset); Offset tray (upper): max. 500-sheet paper capacity (based on 80 g/m²); Stapling capacity: max. 50-sheet multi-position staple (based on 80 g/m²); Manual Stapling: 1-point at rear (Flat), 45 sheets (64 g/m²), 40 sheets (80 g/m²); Stapleless capacity: max.10-sheet (64 g/m²), 8 sheet (65-81.4 g/m²), 6 sheet (81.5 - 105 g/m²); Requires BP-RB10 Paper Pass Unit

MX-PN16B Punch Module - 3 Hole

Punch module for BP-FN15/BP-FN16

BP-FN15 3k Finisher

A3-B5 (offset/staple), SRA3-A5R (non offset); Offset tray (upper): max. 3,000-sheet paper capacity (based on 80 g/m²); Stapling capacity: max. 65-sheet multi-position staple (based on 80 g/m²); Manual Stapling: 1-point at rear (Flat), 45 sheets (64 g/m²), 40 sheets (80 g/m²); Stapleless capacity: max. 10-sheet (64 g/m²), 8 sheet (65 - 81.4 g/m²), 6 sheet (81.5 - 105 g/m²); Requires BP-RB10 Paper Pass Unit

Specifikationer

Allmänt

Hastighet svartvitt kopior/utskrifter per minut (A4)	36
Teknologi	18
Pappersstorlek min	A6R
Pappersstorlek max	A3W
Pappersvikt min (g/m ²)	60
Pappersvikt max (g/m ²)	300
Papperskapacitet: Standard (ark)	650
Papperskapacitet: Max (ark)	6300
Uppvärmningstid (sek)	14
Minne max (GB)	5
[MFPSpecificationStorageStd]	SSD
[MFPSpecificationStorageOpt]	SSD
[MFPSpecificationSsdCapStdGb]	128
[MFPSpecificationSsdCapOptGb]	512
Duplex	Std.
Elanslutning: frekvens min. (Hz)	50
Elanslutning: frekvens max. (Hz)	60
Energiförbrukning (kW)	1,84
Bredd basenhet (mm)	608
Djup basenhet (mm)	653
Höjd basenhet (mm)	829
Vikt (kg)	64
Elanslutning: min. (V)	220
Elanslutning: max. (V)	240

Kopiator

Pappersstorlek max	A3
Tid för förstakopia svartvitt (sek)	4,5
Elektronisk sortering	Opt.
Kontinuerlig kopiering (max kopior)	9999
Upplösning scanning svartvitt (dpi)	600 x 600, 600 x 400
Upplösning scanning färg (dpi)	600 x 600
Upplösning skrivare (dpi)	600 x 600, 9600 x 600
Gradering (motsvarande nivåer) - färg	256
Gradering (motsvarande nivåer) - svartvitt	2
Zoom min (%)	25
Zoom max (%)	400
Förinställda skalor	10
Nätverksscanner	Push scan, Pull scan

Trådlöst nätverk

Trådlöst nätverk	Opt.
Kommunikationsstandard	IEEE802.11a/ac/b/g/n
Åtkomstnivå	Infrastructure mode, Software AP mode
Säkerhet	WEP, WPA/WPA2-mixed PSK, WPA/WPA2-mixed EAP, WPA2 PSK, WPA2 EAP, WPA2 EAP/WPA3-mixed, PSK/SAE, WPA3 SAE, WPA2/WPA3-mixed, EAP, WPA3 EAP

Arkivering

Dokumentarkivering	Std.
Lagrade jobb	Kopiering, Utskrift, Scanning, Fax
Lagringsmapp	Snabb, Huvud, Anpassad (max. 1000)

Skrivare

Nätverksskrivare	Std.
Upplösning (dpi)	600 x 600, 9600 x 600
Gränssnitt std	USB 2.0, USB 3.0, 10Base-T, 100Base-TX, 1000Base-T
Stöder operativsystem standard	Windows 8.1, Windows 10, Windows 11, Windows Server 2012, Windows Server 2012R2, Windows Server 2016, Windows Server 2019
Stöder operativsystem tillbehör	Mac OS X 10.10, Mac OS X 10.11, Mac OS X 10.12, Mac OS X 10.13, Mac OS X 10.14, Mac OS X 10.15, Mac OS X 11, Mac OS X 12
Nätverksprotokoll	TCP/IP (IPv4, IPv6)
Utskriftsprotokoll	LPR, Raw TCP (port 9100), POP3 (e-mail printing), HTTP, FPT for downloading print files, IPP, SMB, WSD
Typsnitt	80 PCL, 139 PostScript 3

Fax

Fax	Opt.
Komprimeringsmetod	MH, MR, MMR, JBIG
Kommunikationsprotokoll	Super G3, G3
Överföringstid	2
Modemhastighet min (bps)	2400
Modemhastighet max (bps)	33600
Överföringsupplösning std (dpi)	203.2 x 97.8 dpi
Överföringsupplösning ultrafin (dpi)	406.4 x 391 dpi
Arbetsbredd (min)	A5
Arbetsbredd (max)	A3
Minne max (GB)	4
Gråskalenivåer	256
Registrering av inkommande/utgående fax	2000
Gruppssändning	500

Scanner

Scanningmetod	Std.
Upplösning push scan (dpi)	100, 150, 200, 300, 400, 600
Upplösning pull scan (dpi)	75, 100, 150, 200, 300, 400, 600, 50-9600
Filformat std	TIFF, PDF, PDF/A-1a, PDF/A-1b, Encrypted PDF, Compact PDF, JPEG, XPS, Searchable PDF, Microsoft Office (pptx, xlsx, docx), Text (TXT), Rich Text (RFT)
Scannerdestination	Desktop, FTP, E-post, Nätverksmapp, USB minne

Efterbehandlare

Kapacitet min (ark)	500
Kapacitet max (ark)	3000
Häftning max (ark)	65
Sadelhäftning	Opt.
Off-set förskjutning	Std.
Hålslag	Opt.

Tonerkapacitet

Svart (sidor med 5 % täckningsgrad)	40000
-------------------------------------	-------

